

**Panasonic**  
ideas for life

**P2HD**

**AJ-HPM110**

Memory Card Portable Recorder/Player



**AVC INTRA** **DVCPRO HD** **DVCPRO 50** **DVCPRO** **DX**



Official Worldwide  
Olympic Partner

# P2 HD



## P2 HD Mobile Recorder for HD Production with Native 1080/24p Recording and 1080/24PsF Input/Output

The AJ-HPM110 P2 Mobile is a multi-purpose recorder that uses the P2 memory card to bring mobility and speed to news and program production, both on the desktop and in the studio. HD multi-formatting lets the AJ-HPM110 support conventional 1080i and 720p, as well as 1080/24PsF input/output and native 1080/24p\* recording. This makes the AJ-HPM110 ideal for the high-end HD production of movies and commercials. The AJ-HPM110 also includes a host of editing functions, like the RS-422A remote function for producing P2 clips from an external VTR, and a playlist function for editing and copying clips to cards.

\*Video is recorded to the P2 card in the 1080/23.98p format. For details on input signals and recording formats, see the table entitled "Input Signals and Corresponding Recording Formats" on page 4.

### New Functions Now Offered on the AJ-HPM110

- 1080/24PsF input/output, native 1080/24p recording
- Creating New Clips From the Playlist (Editcopy function)
- Production of clips from external VTR sources via RS-422A remote
- Extracting active frames from Variable Frame Rate (VFR) signals (720/Xp over 59.94p or 60p)
- Loop Rec function





## ADVANCED AVC-INTRA CODEC AND P2 CARD'S EXTENDED CAPACITY ENABLE LONG-TIME RECORDING AND BROADCASTING OF HIGH-QUALITY HD IMAGES

### Reliable, Low-Cost P2 Card with 32 GB Capacity

The compact and light P2 card holds 32 GB\* (AJ-P2C032RG) of data. The new AJ-HPM110 P2 Mobile records AV data as MXF files, which expedites and streamlines news gathering and program production. Because the P2 card has no moving mechanisms, it offers outstanding reliability and high resistance to impact, vibration and temperature fluctuations. Reusable many times, the P2 card can reduce operating costs and minimize environmental impact.

\*Total card capacity includes space for data management such as system data; therefore, actual usable area is less than the capacity indicated on the card.

### Six P2 Card Slots

With its six card slots, the AJ-HPM110 holds six 32 GB P2 cards for recording over 3 hours of DVCPRO HD, 8 hours of DVCPRO HD / AVC-Intra 100 720 24p native or 4 hours of AVC-Intra 100 1080 24p native content. It will play a continuous, extended clip recorded in sequence onto six P2 cards. Or, you can mount five P2 cards recorded using a P2 cam, and output the playlist editing result to a sixth P2 card.

\*For detailed recording times, see the table entitled "Input Signals and Corresponding Recording Formats" on page 4.


### Optional Board for AVC-Intra Recording and Playback

The AJ-YBX200G codec board (purchased separately) adds AVC-Intra codec recording and playback capabilities to the AJ-HPM110. The AVC-Intra codec is based on the advanced motion image compression technology of the H.264 standard, which brings superb image quality, a highly-efficient encoding, and outstanding editing precision to broadcasting applications. The intra-frame compression system of this codec ensures stable quality for fast-motion images, degradation-free frame-by-frame editing, and fast processing with a multi-core CPU. The high-accuracy intra prediction process (see diagram below) and advanced, context-adaptive entropy coding technology combine to provide twice the intra-frame compression efficiency of MPEG-2.




### High-Quality Images with AVC-Intra 100, Low Bit Rate with AVC-Intra 50

AVC-Intra 100 records high-quality, full-pixel, full-sampling HD images (1920 x 1080, 4:2:2, 10-bit) at the same bit rate as DVCPRO HD, while AVC-Intra 50 provides DVCPRO HD-level images (1440 x 1080, 4:2:0, 10-bit) at a low bit rate and low operating cost. The AJ-HPM110 can be set to either mode to meet a wide range of HD production needs.

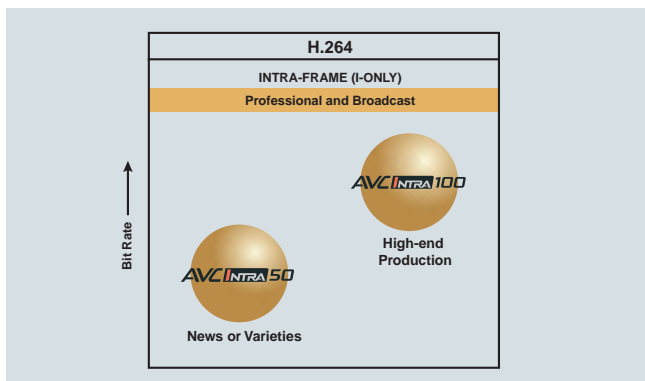

### Endless Recording with Loop Rec

The loop rec function continuously records video data onto available memory card areas. When the card becomes full, older data is deleted to free up the recording area, resulting in loss-less, endless recording. When used with cameras for time-sensitive, information gathering like weather and news reporting, the loop rec function holds the latest video data for a predetermined time period.

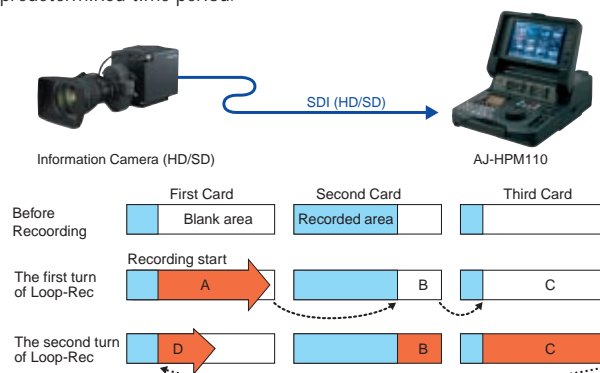


\*Image data is recorded continuously in available areas (in the order A → B → C) of the P2 card. When the remaining recording time drops to 30 seconds, data in area A is deleted, and data is recorded in area C until it becomes full (0 seconds remaining), then data is recorded in area D.

### Eight Channels of 16-bit Digital Audio

AVC-Intra and DVCPRO HD offer superb 16-bit linear PCM sound quality, with eight embedded channels for recording in 5.1-channel surround sound. The AJ-HPM110 P2 Mobile uses HD-SDI for independent input/output and editing of all eight channels. The SD mode supports four-channel recording and playback in all codec systems (DVCPRO 50, DVCPRO, DV).

### •Sample Image of the Intra Prediction Process

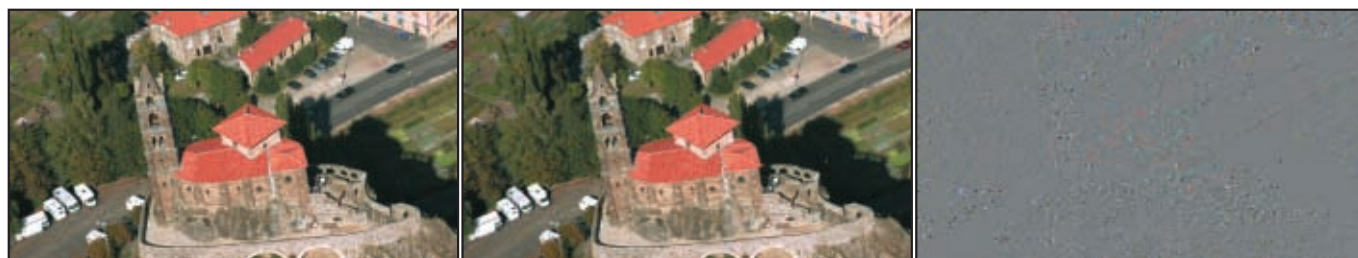

Left: Original image Center: Intra-frame predictive image

Right: Difference image obtained from subtracting the intra-frame predictive image from the original image. This shows the high accuracy of intra prediction.

# ADVANCED AVC-INTRA CODEC AND P2 CARD'S EXTENDED CAPACITY ENABLE LONG-TIME RECORDING AND BROADCASTING OF HIGH-QUALITY HD IMAGES

## Native 24p Recording with 1080/24PsF

The AJ-HPM110 supports 1080/24p (30p/25p) recording and playback in both AVC-Intra 100 and AVC-Intra 50 modes. In HD-SDI mode, it supports 1080/24PsF input/output for use in high-end movie production. The AJ-HPM110 combines easy portability and convenient nonlinear acquisition in a 24p recorder.

## HD/SD Multi-Format Compatibility

Supporting a wide range of HD formats, such as 1080p, 1080i and 720p, the AJ-HPM110 can be switched to 59.94 Hz or 50 Hz to adapt to the world's HD broadcasting formats. It also supports SD, and multi-codec recording (DVCPRO 50, DVCPRO, DV) is possible in both NTSC (480i) and PAL (576i).

## Speed Effects with the VariCam/AG-HVX200


The AJ-HPM110 can extract active frames from VFR (variable frame rate) signals output by a VariCam and record them in 720/24p (30p/25p). The built-in monitor lets you check the VFR effect during playback. The AJ-HPM110 can also provide VariCam-like 60p pull-down output (50p from 25p signals) by playing back a video clip in a P2 card recorded in native 720/24p (30p/25p) by a P2 camera-recorder.

## Up-/Down-/Cross-Conversion

The AJ-HPM110 can convert up or down between HD and SD or cross-convert between 720p and 1080i during playback. Also featuring an aspect conversion function, the versatile AJ-HPM110 handles a wide range of video formats.



## CORRESPONDENCE CHART OF 24P/25P/30P INPUT/OUTPUT

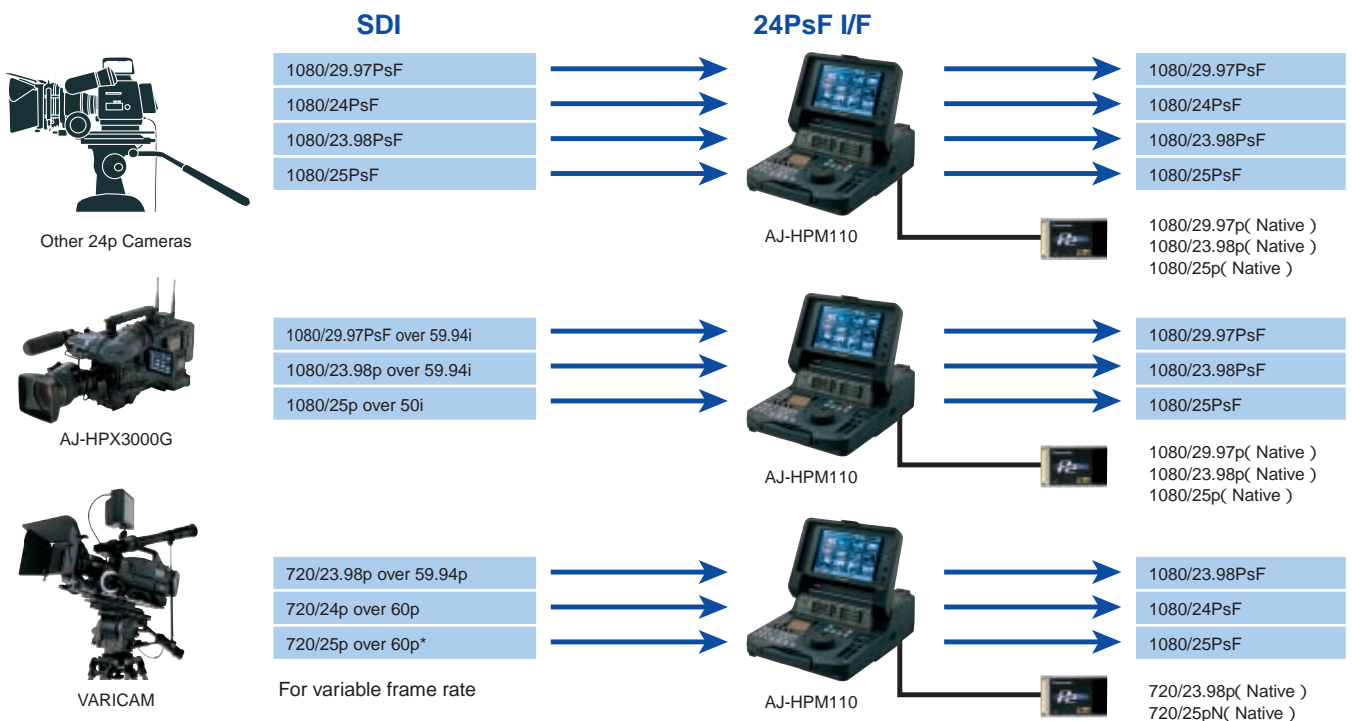

\*720/Xp(4p to 50p) over 60p can generate 720/25pN via AJ-HPM110.

# Input Signals and Corresponding Recording Formats

| Recording Codec  | Input Signal              | menu screen*1 | Recording Format (P2 Card) | Recording Time (With Six 32 GB P2 cards) |             | SDI Output*2             | Analog Outpt*2            | IEEE 1394 Output | Time Code Output |
|--|---------------------------|---------------|----------------------------|--|-------------|--------------------------|---------------------------|------------------|------------------|
|  |                           |               |                            | AVC-Intra100                             | AVC-Intra50 |                          |                           |                  |                  |
| AVC-Intra 50/100 (With AJ-YBX200G AVC-Intra Codec Board) | 1080/59.94i               | 59.94         | 1080/59.94i                | 192min.                                  | 384min.     | 1080/59.94i              | 1080/59.94i               | —                | yes              |
|  |                           |               |                            |  |             | 720/59.94p               | 720/59.94p                |                  |                  |
|  |                           |               |                            |  |             | 480/59.94i               | 480/59.94i                |                  |                  |
|  | 1080/50i                  | 50            | 1080/50i                   |  |             | 1080/50i                 | 1080/50i                  | —                | yes              |
|  |                           |               |                            |  |             | 720/50p                  | 720/50p                   |                  |                  |
|  |                           |               |                            |  |             | 576/50i                  | 576/50i                   |                  |                  |
|  | 1080/29.97PsF             | 29.97         | 1080/29.97p (Native)*6     | 240min.                                  | 480min.     | 1080/29.97PsF            | 1080/29.97PsF over 59.94i | —                | —                |
|  |                           |               |                            |  |             | 720/29.97PsF over 59.94p | 720/29.97PsF over 59.94p  |                  |                  |
|  |                           |               |                            |  |             | 480/29.97PsF over 59.94i | 480/29.97PsF over 59.94i  |                  |                  |
|  | 1080/23.98p over 59.94i*3 | 59-23         | 1080/23.98p (Native)*6     |  |             | 1080/23.98PsF            | —                         | —                | —                |
|  | 1080/23.98PsF             | 23.98         | 1080/23.98p (Native)*6     |  |             | 1080/23.98PsF            | —                         | —                | —                |
|  | 1080/24PsF                | 24            | 1080/23.98p (Native)*6     |  |             | 1080/24PsF               | —                         | —                | —                |
|  | 1080/25PsF                | 25            | 1080/25p (Native)*6        | 192min.                                  | 384min.     | 1080/25PsF               | 1080/25PsF over 50i       | —                | —                |
|  |                           |               |                            |  |             | 720/25PsF over 50p       | 720/25PsF over 50p        |                  |                  |
|  |                           |               |                            |  |             | 576/25PsF over 50i       | 576/25PsF over 50i        |                  |                  |
|  | 720/59.94p                | 59.94         | 720/59.94p                 |  |             | 720/59.94p               | 720/59.94p                | —                | yes              |
|  |                           |               |                            |  |             | 1080/59.94i              | 1080/59.94i               |                  |                  |
|  |                           |               |                            |  |             | 480/59.94i               | 480/59.94i                |                  |                  |
|  | 720/50p                   | 50            | 720/50p                    | 384min.                                  | 768min.     | 720/50p                  | 720/50P                   | —                | yes              |
|  |                           |               |                            |  |             | 1080/50i                 | 1080/50i                  |                  |                  |
|  |                           |               |                            |  |             | 576/50i                  | 576/50i                   |                  |                  |
|  | 720/29.97p over 59.94p*4  | 29.97         | 720/29.97p (Native)*6      |  |             | 720/29.97p over 59.94p   | 720/29.97p over 59.94p    | —                | —                |
|  |                           |               |                            |  |             | 1080/29.97PsF            | 1080/29.97p over 59.94i   |                  |                  |
|  |                           |               |                            |  |             | 480/29.97p over 59.94i   | 480/29.97p over 59.94i    |                  |                  |
|  | 720/23.98p over 59.94p*4  | 59-23         | 720/23.98p (Native)*6      | 480min.                                  | 960min.     | 1080/23.98PsF            | —                         | —                | —                |
|  | 720/24p over 60p*4        | 60-24         | 720/23.98p (Native)*6      |  |             | 1080/24PsF               | —                         | —                | —                |
|  | 720/25p over 50p*5        | 25            | 720/25p (Native)*6         | 384min.                                  | 768min.     | 720/25p over 50p         | 720/25p over 50p          | —                | —                |
|  |                           |               |                            |  |             | 1080/25PsF               | 1080/25p over 50i         |                  |                  |
|  |                           |               |                            |  |             | 576/25p over 50i         | 576/25p over 50i          |                  |                  |
|  | 720/25p over 60p*4        | 60-25         | 720/25p (Native)*6         |  |             | 720/25p over 50p         | 720/25p over 50p          | —                | —                |
|  |                           |               |                            |  |             | 1080/25PsF               | 1080/25p over 50i         |                  |                  |
|  |                           |               |                            |  |             | 576/25p over 50i         | 576/25p over 50i          |                  |                  |

| Recording Codec      | Input Signal              | menu screen*1 | Recording Format (P2 Card) | Recording Time (With Six 32 GB P2 cards)   | SDI Output*2             | SDI Output*2              | IEEE 1394 Output          | Time Code Output |
|----------------------|---------------------------|---------------|----------------------------|--|--------------------------|---------------------------|---------------------------|------------------|
| DVCPRO HD            | 1080/59.94i               | 59.94         | 1080/59.94i                | 192min.                                    | 1080/59.94i              | 1080/59.94i               | 1080/59.94i               | yes              |
|                      |                           |               |                            |  | 720/59.94p               | 720/59.94p                |                           |                  |
|                      |                           |               |                            |  | 480/59.94i               | 480/59.94i                |                           |                  |
|                      | 1080/50i                  | 50            | 1080/50i                   |  | 1080/50i                 | 1080/50i                  | 1080/50i                  | yes              |
|                      |                           |               |                            |  | 720/50p                  | 720/50p                   |                           |                  |
|                      |                           |               |                            |  | 576/50i                  | 576/50i                   |                           |                  |
|                      | 1080/29.97PsF             | 59.94         | 1080/59.94i                |  | 1080/29.97PsF            | 1080/29.97PsF over 59.94i | 1080/29.97PsF over 59.94i | yes              |
|                      |                           |               |                            |  | 720/29.97PsF over 59.94p | 720/29.97PsF over 59.94p  |                           |                  |
|                      |                           |               |                            |  | 480/29.97PsF over 59.94i | 480/29.97PsF over 59.94i  |                           |                  |
|                      | 1080/23.98p over 59.94i*3 | 59.94         | 1080/59.94i                |  | 1080/23.98PsF*7          | —                         | —                         | —                |
|                      |                           |               |                            |  | 1080/23.98p over 59.94i  | 1080/23.98p over 59.94i   |                           |                  |
|                      |                           |               |                            |  | 720/23.98p over 59.94p   | 720/23.98p over 59.94p    | 1080/23.98p over 59.94i   | yes              |
|                      |                           |               |                            |  | 480/23.98p over 59.94i   | 480/23.98p over 59.94i    |                           |                  |
|                      | 1080/23.98PsF             | —             | —                          | —  | —                        | —                         | —                         | —                |
|                      | 1080/24PsF                | —             | —                          | —  | —                        | —                         | —                         | —                |
|                      | 1080/25PsF                | —             | —                          | —  | —                        | —                         | —                         | —                |
|                      | 720/59.94p                | 59.94         | 720/59.94p                 | 192min.                                    | 720/59.94p               | 720/59.94p                | 720/59.94p                | yes              |
|                      |                           |               |                            |  | 1080/59.94i              | 1080/59.94i               |                           |                  |
|                      |                           |               |                            |  | 480/59.94i               | 480/59.94i                |                           |                  |
|                      | 720/50p                   | 50            | 720/50p                    | 384min.                                    | 720/50p                  | 720/50p                   | 720/50p                   | yes              |
|                      |                           |               |                            |  | 1080/50i                 | 1080/50i                  |                           |                  |
|                      |                           |               |                            |  | 576/50i                  | 576/50i                   |                           |                  |
|                      | 720/29.97p over 59.94p*4  | 29.97         | 720/29.97p (Native)*6      | 480min.                                    | 720/29.97p over 59.94p   | 720/29.97p over 59.94p    | —                         | —                |
|                      |                           |               |                            |  | 1080/29.97PsF            | 1080/29.97p over 59.94i   |                           |                  |
|                      |                           |               |                            |  | 480/29.97p over 59.94i   | 480/29.97p over 59.94i    |                           |                  |
|                      | 720/23.98p over 59.94p*4  | 59-23         | 720/23.98p (Native)*6      | 384min.                                    | 1080/23.98PsF            | —                         | —                         | —                |
|                      | 720/24p over 60p*4        | 60-24         | 720/23.98p (Native)*6      |  | 1080/24PsF               | —                         | —                         | —                |
|                      |                           |               |                            |  |                          |                           |                           |                  |
|                      | 720/25p over 50p*5        | 25            | 720/25p (Native)*6         | 384min.                                    | 720/25p over 50p         | 720/25p over 50p          | —                         | —                |
|                      |                           |               |                            |  | 1080/25PsF               | 1080/25p over 50i         |                           |                  |
|                      |                           |               |                            |  | 576/25p over 50i         | 576/25p over 50i          |                           |                  |
|                      | 720/25p over 60p*4        | 60-25         | 720/25p (Native)*6         |  | 720/25p over 50p         | 720/25p over 50p          | —                         | —                |
|                      |                           |               |                            |  | 1080/25PsF               | 1080/25p over 50i         |                           |                  |
|                      |                           |               |                            |  | 576/25p over 50i         | 576/25p over 50i          |                           |                  |
| DVCPRO50/ DVCPRO/ DV | 480/59.94i                | 59.94         | 480/59.94i                 | 384min. (DVCPRO 50)<br>768min. (DVCPRO/DV) | 480/59.94i               | 480/59.94i                | 480/59.94i                | yes              |
|                      |                           |               |                            |  | 1080/59.94i              | 1080/59.94i               |                           |                  |
|                      |                           |               |                            |  | 720/59.94p               | 720/59.94p                |                           |                  |
|                      | 480/29.97p over 59.94i    | 59.94         | 480/59.94i                 |  | 480/29.97p over 59.94i   | 480/29.97p over 59.94i    | 480/29.97p over 59.94i    | yes              |
|                      |                           |               |                            |  | 1080/29.97PsF            | 1080/29.97p over 59.94i   |                           |                  |
|                      |                           |               |                            |  | 720/29.97p over 59.94p   | 720/29.97p over 59.94p    |                           |                  |
|                      | 480/23.98p over 59.94i    | 59.94         | 480/59.94i                 |  | 1080/23.98PsF*7          | —                         | —                         | —                |
|                      |                           |               |                            |  | 480/23.98p over 59.94i   | 480/23.98p over 59.94i    |                           |                  |
|                      |                           |               |                            |  | 1080/23.98p over 59.94i  | 1080/23.98p over 59.94i   | 480/23.98p over 59.94i    | yes              |
|                      |                           |               |                            |  | 720/23.98p over 59.94p   | 720/23.98p over 59.94p    |                           |                  |
|                      | 576/50i                   | 50            | 576/50i                    |  | 576/50i                  | 576/50i                   | 576/50i                   | yes              |
|                      |                           |               |                            |  | 720/50p                  | 720/50p                   |                           |                  |
|                      | 576/25p over 50i          | 50            | 576/50i                    |  | 576/25p over 50i         | 576/25p over 50i          | 576/25p over 50i          | yes              |
|                      |                           |               |                            |  | 1080/25PsF               | 1080/25p over 50i         |                           |                  |
|                      |                           |               |                            |  | 720/25p over 50p         | 720/25p over 50p          |                           |                  |

\*1: Settings must be made on the menu screen (system frequency mode). \*2: Selection must be made on the menu screen. SDI output and analog output switch simultaneously.

\*3: HD-SDI output signal (1080/23.98p over 59.94i) from AJ-HPX2000/HPX2100/HPX3000. \*4: HD-SDI output signal (variable frame rate) from the AJ-HDC27 series.

\*5: HD-SDI output signal (720/25p over 50p) from the AJ-HPX2100/HPX2000. \*6: This mode records only effective frames. \*7: Output is produced only when the playback system frequency is set to 23.98 or 59.94.



## Clip Thumbnail Display on the 9-Inch Monitor

The AJ-HPM110's built-in 9-inch LCD monitor not only serves as a playback monitor, it also displays clips in a thumbnail list. You can select a clip and play it back immediately. Each thumbnail is indicated with a text memo and a symbol that shows the presence or absence of a shot marker. You can also set the AJ-HPM110 to display only the clips you select in the thumbnail list. The crosshair cursor buttons or jog dial let you select a thumbnail quickly and easily.



## Clip Management

You can delete, copy or merge clips, or add a shot marker and text memo. Details of each clip can be viewed in a properties window.


## Playlist Allows VTR-Like Nonlinear Editing

The P2 card enables a highly advanced playlist function. You can mark up to 100 events using In and Out points and play the events in any order. Thanks to the P2 card's unique high-speed random access capability, you get seamless, continuous, on-the-spot playback with no time lag or other disruptions between cuts (clips)\*\*. Edit the recordings and use the results in on-air broadcasts — a quick, easy solution for breaking news reporting and similar "when it counts" tasks. You can mark In and Out points, cue, review, trim and perform other tasks in almost the same way as you would with a conventional editing controller. The display of playlist and event properties lets you handle production and correction tasks intuitively and accurately.



Display on the Monitor

### Concept Chart of Playlist Function




\* No transition setting or effect is available. V fade between events can be set only for audio.

\*\* The cuts (clips) should be the same format.

## Overwrite (Insert) Editing with the Playlist

Source materials from another clip can be inserted into the playlist. This gives you the same result as insert editing with a VTR. The AJ-HPM110 lets you insert edit in three modes: video, audio and both.

### Concept Chart of Insert Editing

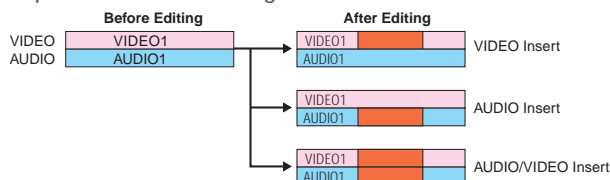

\* Only video and audio from another clip on a P2 card mounted in the card slot of the same AJ-HPM110 can be inserted. Insert editing is not possible between two connected units.




Control Panel of the AJ-HPM110

## Audio Split/Audio Dubbing with the Playlist


The AJ-HPM110's audio split\* feature makes it possible, using the playlist, to move the audio In point forward or backward relative to the video In point. Also, one or two additional audio channels can be recorded onto a recorded clip. This lets you connect a microphone for voiceovers. The input audio can be mixed with the playback sound.

### Concept Chart of Audio Split



\* All channels are moved forward or backward at the same time. You cannot move a single channel independently.

### Concept Chart of Voice Over



## Creating New Clips From the Playlist (Editcopy function)

Playlists can be saved as files and reused. The edit/copy function can also write out the result of playlist playback as a separate clip. The AJ-HPM110 lets you edit and copy image data over multiple P2 cards for extended HD editing.


## Jog/Shuttle Dial and Audio Fader

Like a broadcast editor, the AJ-HPM110 is equipped with a jog & shuttle dial. You can shuttle search at 100x normal speed in forward or reverse and jog search within a range of -1x to +1x speed. Audio can be monitored up to 10x speed. Equipped with large audio fader levers, the AJ-HPM110 also can be used as an audio mixer.


## RS-422A Remote and Capture IN Function

The AJ-HPM110 is equipped with an RS-422A remote terminal to interface with a broadcasting VTR. Using an external controller, this lets you operate the AJ-HPM110 as an editor-player. The Capture IN function provides control over an external VTR from the AJ-HPM110 control panel for easy production of P2 clips from tape sources.

### RS-422A A/B Roll Edit System

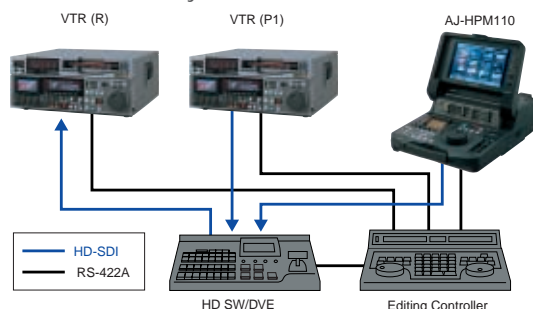

### Capture IN function

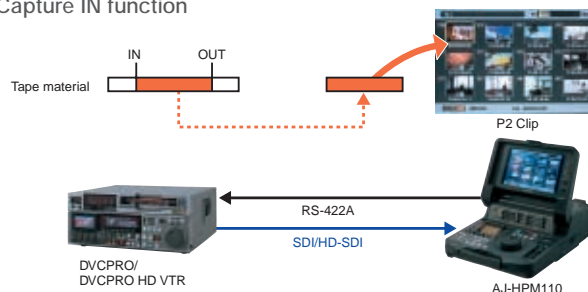

## USB 2.0 Host Function

### Allows Use of a Hard Disk Drive

The AJ-HPM110 is equipped with a USB 2.0 interface for host/device. In host mode, you can connect a hard disk drive and read and write P2 files. In device mode, you can connect a PC (or nonlinear editor) and use the AJ-HPM110 as a P2 card drive for direct transfer of P2 clips into nonlinear editing software.

## HD/SD Serial Digital Interface

The AJ-HPM110 comes equipped with an SDI terminal, the standard interface in broadcasting systems. It also has HD-SDI input/output and SD-SDI input/output capabilities. This allows the AJ-HPM110 to handle a variety of operations such as line recordings, studio production and on-air broadcasting. The input system can be separately selected for video and audio with the Input Select key on the front panel.

## Analog Input/Output

The AJ-HPM110 is equipped with various analog I/Os: Composite In, HD Component Out/Composite Out (shared), Composite Monitor Out, Audio In/Out (4 channels), and Audio Monitor Out (2 channels).

## Menu Setting and User File

Using the crosshair cursor buttons or jog dial, it's easy to select menu items and make settings on the LCD monitor. A user file containing up to five groups of settings can be saved or loaded. You can assign frequently used menu items to the three PF keys, then select them instantly with the touch of a finger.

## SD Card Slot

The AJ-HPM110 has an SD/SDHC card slot. By using the P2 viewer software, you can create a metadata upload file containing the names of the camera operator and reporter, the shooting location and other text information, and save it onto an SD/SDHC card. The AJ-HPM110 can then read the information as metadata.

## IEEE 1394 Digital Interface

An IEEE 1394 digital interface comes standard on the AJ-HPM110. Connect a DVCPRO HD camera-recorder/VTR or Focus FireStore, and the AJ-HPM110 can input or output a DVCPRO-compressed stream with no image degradation. This lets you extend the AJ-HPM110's recording and backup capabilities.

\* Input/output is possible only when the system frequency mode is set to 59.94/50 Hz. Input/output is not possible in AVC-Intra mode.



Connecting with Focus FS-100

## Rugged Casing

With its rugged casing and magnesium die-cast frame, the AJ-HPM110 is tough enough for go-anywhere field production. The rear connector section is protected by a cover. With the editing panel closed, the AJ-HPM110 is the size of a large briefcase and comes equipped with a metal handle for easy carrying. You can take it onboard an airplane as a carry-on.



## AC/DC

The versatile AJ-HPM110 runs on either 100 to 240-V AC or 12-V DC. Plug it in and you have an outstanding desktop recorder, or take the AJ-HPM110 outside and mount it in an OB van or carry it right into the field.

## P2HD 5-year Warranty Repair Program

The P2HD five year warranty repair program further enhances the P2 card's outstanding reliability and durability, and helps to reduce running costs. Once you purchase the AJ-HPM110, simply visit Panasonic's Website and activate the five year warranty repair program.

\*Please note that this program is not available in some countries and regions. The standard warranty period may vary depending on the country or region. Not all repair work is covered by this extended warranty. The maximum warranty period may be adjusted depending on the hours of use. Details about user registration and the program: [http://panasonic.biz/sav/pass\\_e](http://panasonic.biz/sav/pass_e)



Side Connector Panel




Rear Connector Panel

## VE-STYLE PRODUCTION WITH 24PSF ADDS WORKFLOW FLEXIBILITY


## FIELD RECORDING: As a Viewer and Editor

The P2 Mobile is an outstanding support tool for news gathering and other field operations using a shoulder-mounted DVCPRO P2 camcorder or the AG-HVX200. Use it for a variety of tasks -- monitoring recorded clips, on-site playlist production, editing, or producing backup copies on an external hard disk drive.

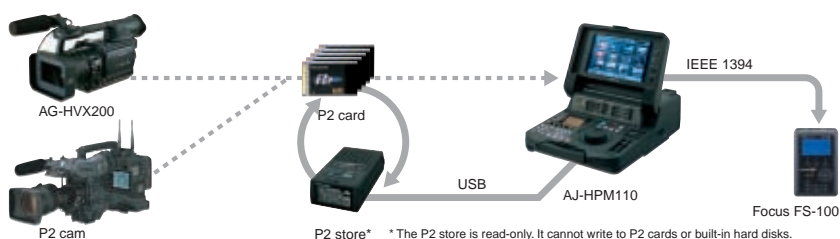


## FIELD ACQUISITION: As a Portable Recorder for Extended Backup Recording

The P2 Mobile is ideal for backup recording, with start/stop operation linked to the camera-recorder for both IEEE 1394 and HD-SDI connections. Six P2 card slots extend recording time.

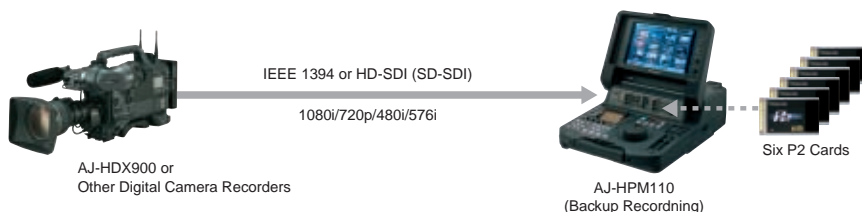


## CINEMA-LIKE PRODUCTION: 1080/24p Recording from Digital Cinema Cameras

The AJ-HPM110 can record signals from a digital cinema camera via the 1080/24PsF interface in native 1080/24p format using the AVC-Intra 100 or AVC-Intra 50 codec. It can also input signals of 720/XP over 60p from a VariCam and record them in native 24p. P2 cards containing 1080/24p recorded by the AJ-HPX3000G or AG-HVX200 P2 HD camera-recorder can be inserted into the AJ-HPM110 for direct transfer. The versatility of the AJ-HPM110 responds to a wide range of cinema and cinema-like program production needs.

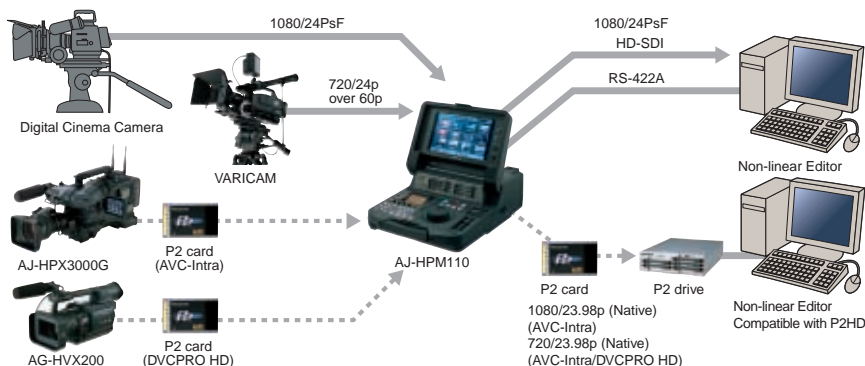

## IN EDITING STUDIOS: For Tape-and-Card Mixed Environments


With the playlist, cut editing can be performed using only the AJ-HPM110. When connected to a nonlinear editor via USB2.0, the AJ-HPM110 serves as a P2 drive.\* The RS-422A terminal lets you control a VTR player, while the Capture IN function simplifies the production of P2 clips from tape sources. In these and other ways, the AJ-HPM110 adapts nicely to production environments where both tapes and cards are used.

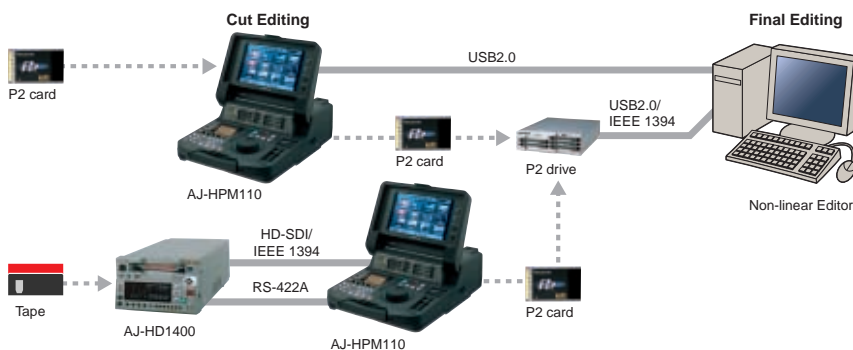

\* Installation of the P2 card driver (provided with each product) is required. The P2 card driver operates on Windows Vista, Windows XP, Windows 2000, and Mac OS X.

## OB VAN: Immediate Processing of Recordings

Compact, lightweight and versatile, the P2 Mobile lets you make effective use of the limited space in an OB van. Use it to make line recordings of HD(SD)-SDI input data, or for digital tape-to-card copying of DVCPRO HD data input via IEEE 1394. The P2 Mobile can combine the input content with a source recorded on a P2 card for relay broadcasts, and it expedites playlist transmission.

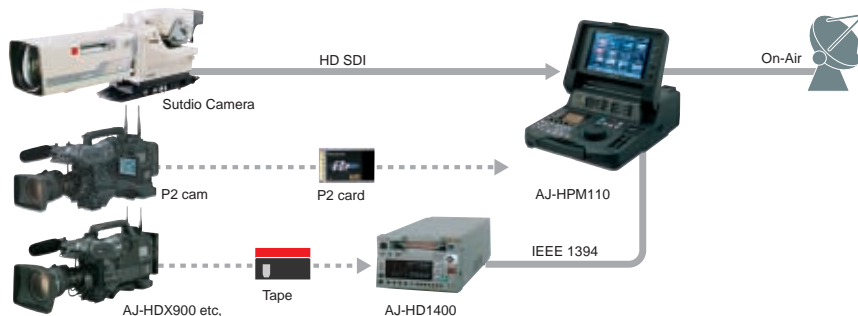



## AJ-HPM110 OPTIONAL EQUIPMENT



**AJ-PC016RG /  
AJ-PC032RG**  
R-series Memory Card



**Focus  
Enhancements, Inc.  
FireStore FS-100**  
Portable DTE Recorder



SD/SDHC Memory Card



**AJ-YBX200G**  
AVC-Intra Codec Board

### P2HD UTILITY SOFTWARE

You can download the following P2 Utility Software at panasonic web site.  
<<https://www.pavc.panasonic.co.jp/pro-av/support/desk/e/download.htm>>

#### Utility Software:

- P2 Store Manager
- Drive Mount Converter
- P2 Viewer
- P2 Contents Management Software
- P2 Card Format Station
- CAC File for P2 Camera-Recorder

## AJ-HPM110 SPECIFICATIONS

### General Specification

|                            |   |
|----------------------------|---|
| Power Source:              | AC 100 V to 240 V, 50/60 Hz<br>DC 12V/4.8A  |
| Operating Temperature:     | 0°C to 40°C (32 °F to 104 °F)   |
| Operating Humidity:        | 10% to 80% (no condensation)  |
| Weight:                    | 6.5 kg (14.4 lbs)   |
| Dimensions (W x H x D):    | 301x 120 x 412mm (11-7/8" x 4-3/4" x 16-1/4")   |
| Recording Format:          | AVC-Intra 100*/AVC-Intra 50/DVCPRO HD/<br>DVCPRO 50/DVCPRO/DV switchable  |
| Recording Video Signal:    | 1080/59.94i, 1080/23.98p*, 1080/24p*,<br>1080/29.97p*, 1080/25p*, 1080/50i,<br>720/59.94p, 720/50P, 480/59.94i, 576/50i                         |
| Audio Recording Format:    | AVC-Intra100*/AVC-Intra50*/DVCPRO HD:<br>48kHz/16bits, 8CH<br>DVCPRO 50:<br>48kHz/16bits, 4CH<br>DVCPRO/DV:<br>48kHz/16bits, 2CH/4CH switchable |
| Recording Media:           | P2 card   |
| Recording/Playback Time**: | [AVC-Intra100*/DVCPRO HD]<br>by single cards using 6 card slot  |
| AJ-P2C016RG                | Approx. 16 min. Approx. 96 min.   |
| AJ-P2C032RG                | Approx. 32 min. Approx. 192 min.  |
| Recording/Playback Time**: | [AVC-Intra 50*/DVCPRO 50]<br>by single cards using 6 card slot  |
| AJ-P2C016RG                | Approx. 32 min. Approx. 192 min.  |
| AJ-P2C032RG                | Approx. 64 min. Approx. 384 min.  |
| Recording/Playback Time**: | [DVCPRO/DV]<br>by single cards using 6 card slot  |
| AJ-P2C016RG                | Approx. 64 min. Approx. 384 min.  |
| AJ-P2C032RG                | Approx. 128 min. Approx. 768 min.   |
| Digital Slow:              | -1 to +1 times normal speed   |

\*1: When using AVC-Intra Codec Card AJ-YAB200G

\*2: \* Time shown above is when you record a series of 1 shot to P2 card. Depending on numbers of shots you record, time will get shorter than the number shown above.

\*4GB/8GB P2 Card can be used.

### Video Specification (Digital Video)

|                     |   |
|---------------------|---|
| Sampling Frequency: | AVC-Intra 100/AVC-Intra 50/DVCPRO HD<br>(59.94Hz/23.98Hz):Y:74.176MHz, PB/PR:37.088MHz<br>(24Hz/25Hz/50Hz/60Hz):<br>Y:74.25MHz, PB/PR:37.125MHz<br>DVCPRO 50: Y:13.5MHz, PB/PR:6.75MHz<br>DVCPRO: Y:13.5MHz, PB/PR:3.375MHz |
| Quantizing:         | AVC-Intra 100/AVC-Intra 50: 10bits<br>DVCPRO HD/DVCPRO 50/DVCPRO/DV: 8 bits   |
| Compression Format: | AVC-Intra 100/AVC-Intra 50: H 264/AVC Intra Profile<br>DVCPRO HD: DV-Based Compression (SMPTE 370M)<br>DVCPRO HD/DVCPRO 50/DVCPRO/DV:<br>DV-Based Compression (SMPTE /314M)   |
| Video Bit Rate:     | AVC-Intra 100/DVCPRO HD: 100Mbps<br>AVC-Intra 50/DVCPRO 50: 50Mbps<br>DVCPRO: 25Mbps  |

### Video Input Signal

|                         |  |
|-------------------------|--|
| Analog Composite Input: | BNC x 1, 1.0 Vp-p (75Ω)  |
| Reference Input:        | BNC x 2 (loop-through),<br>Black Burst/HD tri-sync auto, 75Ω auto  |
| SDI (HD/SD) Input:      | BNC x 1, serial digital component<br>HD: SMPTE 292M/296M/299M standard<br>SD: SMPTE259M-C/272M-A standard<br>ITU-R BT.656-4 standard |

### Video Output Signal

|                      |  |
|----------------------|--|
| HD Component Output: | BNC x 3 (Y,Pb,Pr) Y: 1.0 Vp-p, 75Ω               |
| Composite Output:    | BNC x 3, (Video 1/Video 2/Video 3) 1.0 Vp-p, 75Ω |

|                     |  |
|---------------------|--|
| SDI (HD/SD) Output: | BNC x 1, serial digital component<br>HD: SMPTE 292M/296M/299M standard<br>SD: SMPTE259M-C/272M-A standard<br>ITU-R BT.656-4 standard |
|---------------------|--|

|                 |         |
|-----------------|---------|
| Monitor Output: | BNC x 1 |
|-----------------|---------|

### Video Output Adjustment Range

|                     |                            |
|---------------------|----------------------------|
| Output Gain:        | -∞ to +3 dB or -∞ to +6 dB |
| Chroma Output Gain: | -∞ to +3 dB                |
| Chroma Phase:       | ± 30°                      |
| Setup Level:        | ± 10%                      |
| Sink Phase:         | ± 15 μs                    |
| SC Phase:           | ± 180°                     |

### Audio Specification (Digital Audio)

|                     |   |
|---------------------|---|
| Sampling Frequency: | 48 kHz (sync video)                                   |
| Quantizing:         | 16 bits   |
| Frequency Response: | 20 Hz to 20 kHz, ±1.0 dB (reference level)            |
| Dynamic Range:      | More than 85 dB (1 kHz, emphasis off, "A" weighted)   |
| Distortion:         | Less than 0.1% (1 kHz, emphasis off, reference level) |
| Cross Talk:         | Less than -80 dB (1 kHz, between 2 channels)          |
| Headroom:           | 20/18 dB switchable                                   |
| De-emphasis:        | T1=50 μsec, T2=15 μsec (on/off auto)                  |

### Audio Input Signal

|                       |  |
|-----------------------|--|
| Audio (Analog) Input: | XLR x 4 (CH1/CH2/CH3/CH4),<br>600Ω/high-impedance switchable,<br>+4/0/-3/-20 dBu switchable<br>LINE/MIC/MIC+48V switchable at CH2<br>MIC: -60 dBu, MIC+48V: Phantom +48V, -60dBu |
| SDI Input:            | BNC x 1<br>HD: SMPTE 292M/296M/299M standard<br>SD: SMPTE259M-C/272M-A standard<br>ITU-R BT.656-4 standard   |

### Audio Output Signal

|                        |  |
|------------------------|--|
| Audio (Analog) Output: | XLR x 4 (CH1/CH2/CH3/CH4), low-impedance,<br>+4/0/-3/-20 dBu switchable                                    |
| SDI Output:            | BNC x 1<br>HD: SMPTE 292M/296M/299M standard<br>SD: SMPTE259M-C/272M-A standard<br>ITU-R BT.656-4 standard |
| Monitor Output:        | Pin jack x 2, -8dBV  |
| Headphones:            | Stereo mini jack, 8Ω, variable level   |

### Other Input and Output

|                   |  |
|-------------------|--|
| Time Code Input:  | BNC x 1, 0.5 to 8.0 Vp-p, 10 kΩ  |
| Time Code Output: | BNC x 1, low-impedance, 2.0±0.5 Vp-p   |
| RS-422A Input:    | D-sub 9-pin, RS-422A Interface   |
| DVCPRO/DV:        | 6-pin x 1<br>400/200/100 Mbps switchable<br>IEEE1394-1995 standard<br>IEC61883-Part1, Part2 standard<br>SMPTE 396M standard<br>AV/C Command Set standard |
| USB2.0:           | Host x 1, Device x 1   |

Weight and dimensions shown are approximate.  
Specifications are subject to change without notice.

5 year warranty repair program is available for AJ-HPM110.  
Please visit the website below to activate the program.  
<[http://panasonic.biz/sav/pass\\_e](http://panasonic.biz/sav/pass_e)>





## P2HD 5 Year Warranty Repair Program<sup>\*1</sup>

Customers who register as users on the website will receive an extended warranty repair valid for up to five years.

|                           | 1 <sup>st</sup> year         | 2 <sup>nd</sup> year                   | 3 <sup>rd</sup> year | 4 <sup>th</sup> year | 5 <sup>th</sup> year <sup>*5</sup> |
|---------------------------|------------------------------|--|----------------------|----------------------|------------------------------------|
| P2HD device <sup>*2</sup> | Basic warranty <sup>*3</sup> | Extended warranty repair <sup>*4</sup> |                      |                      |                                    |

<sup>\*1</sup>: Please note that this extended warranty is not available in some countries/regions see web site below for details. <sup>\*2</sup>: Not all models eligible for extended warranty coverage. <sup>\*3</sup>: The basic warranty period may vary depending on the country/region see enclosed warranty for warranty coverage. <sup>\*4</sup>: Not all repair work is covered by this extended warranty see enclosed warranty card for warranty coverage. <sup>\*5</sup>: The maximum warranty period may be adjusted depending on the number of hours the device has been used.



Purchase  
P2 product



Register online  
within 1 month



"Registration Notice"  
e-mail sent

5 years of Warranty Repairs

Make sure to save the "Registration Notice" e-mail during the warranty period.

Details about user registration and the extended warranty: [http://panasonic.biz/sav/pass\\_e](http://panasonic.biz/sav/pass_e)

Please refer to the latest Non-linear Compatibility Information,  
P2 Support and Download and Service Information, etc. at panasonic web site.



<https://www.pavc.panasonic.co.jp/pro-av/index.html>

# Panasonic<sup>®</sup>

### [Countries and Regions]

Matsushita Electric Industrial Co., Ltd.  
Systems Business Group  
2-15 Matsuba-cho, Kadoma, Osaka 571-8503  
Japan  
Phone +81 6 6905 4650 Fax +81 6 6908 5969  
<https://www.pavc.panasonic.co.jp/pro-av/>

Argentina +54 1 308 1610  
Australia +61 2 9986 7400  
Bahrain +973 252292  
Belgium +32 (0)2 481 04 57  
Bulgaria +359 2 946 0786  
Brazil +55 11 3889 4035  
Canada +1 905 624 5010  
China +86 10 6515 8828  
(Hong Kong +852 2313 0888)  
Czech Republic +420 236 032 552/511  
Denmark +45 43 20 08 57  
Egypt +20 2 3938151  
Finland, Latvia, Lithuania, Estonia +358 (9)521 52 53  
France +33 (0)1 55 93 66 67  
Germany, Austria +49 (0)611 235 401  
Greece +30 210 96 92 300  
Hungary +36 (1)382 60 60  
India +91 11 2437 9962  
Indonesia +62 21 385 9449  
Iran +98 21 2271463  
Italy +39 02 6788 422  
Jordan +961 6 586 1914  
Kazakhstan +7 3272 504 777  
Korea +82 2 2106 6641

Kuwait +965 481 2123  
Lebanon +961 1 216827  
Malaysia +60 3 5549 5422 (PSE)  
Mexico +52 55 5488 1000  
Montenegro, Serbia +41 (0)26 466 25 20  
Netherlands +31 73 64 02 577  
New Zealand +64 9 272 0100  
Norway +47 67 91 78 00  
Pakistan +92 5370320 21  
Panama +507 229 2955  
Peru +51 1 614 0000  
Philippines +63 2 633 6162  
Poland +48 (22)338 1100  
Portugal +351 21 425 77 04  
Puerto Rico +1 787 750 4300  
Romania +40 21 211 4855  
Russia & CIS +7495 9804206  
Saudi Arabia +966 1 465 0709  
Singapore +65 6270 0110  
Slovak Republic +421 (0)2 52 92 14 23  
Slovenia, Croatia, Bosnia, Macedonia +44 (0)20 76 63 36 57  
South Africa +27 11 313 1400  
Spain +34 (93) 425 93 00

Sweden +46 (8) 680 26 41  
Switzerland +41 (0)41 259 96 32  
Taiwan +886 2 2725 9100  
Thailand +66 2 731 8888  
Turkey +90 216 578 3700  
U.A.E. +971 4 282201  
Ukraine +380 44 4903437  
[ext. 112]  
U.K. +44 (0) 1344 70 69 20  
U.S.A. +1 201 348 5300



JQA-0443



Factories of Systems Business Group have received  
ISO14001:2004-the Environmental Management  
System certification. (Except for 3rd party's peripherals.)