




Model NO.: **PVS0613**

PORTABLE 6 CHANNEL MULTI-FORMAT VIDEO SWITCHER

- Inputs: 4×SDI and 2×HDMI inputs
- Outputs: 2×SDI & 1×HDMI PGM, 1×SDI PVW, 1×SDI & HDMI multiview
- 13.3 inch LCD monitor
- Portable design, metal case
- T-Bar/ AUTO/ CUT transitions and MIX/ FADE/ WIPE effects
- PIP mode, both size and position is adjustable
- Audio mixer: 3.5mm stereo/ RCA audio & SDI/ HDMI embedded audio
- GPIO interface for live tally system
- FTB for emergency situation

13.3 INCH LCD Display

The all-in-one switcher with an integrated 13.3 inch FHD screen and solid metal case. You can clearly view PVW, PGM with audio bar, multiviewer, clock and menu setting on the screen.

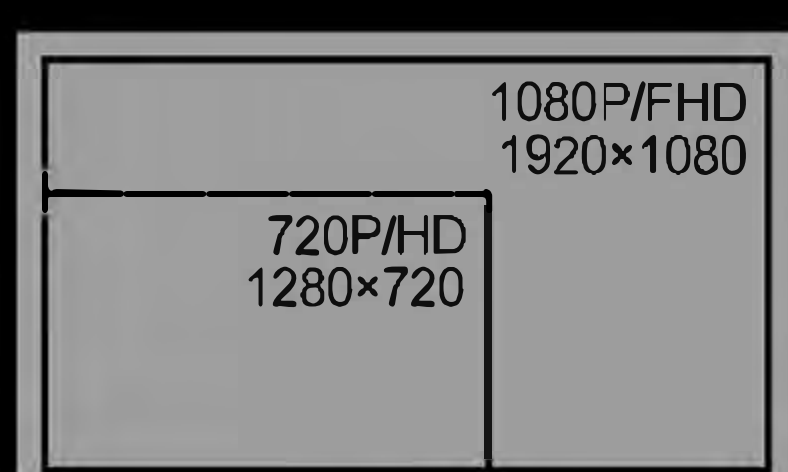

Multi-format & Scaler

Flexible to accept 6 input sources with different format and frame rate, with built-in scaler, PGM output can be scaled to 1080i and 1080p.




Multiview Monitoring

Multiview output make it easy to monitor 6 channels sources as well as PVW and PGM simultaneously on one display, besides, a clock and menu list are located in the lower right corner of the multiview.



PIP

To insert a second picture into/outside the main picture. Simply adjust its size and position, then apply to program.

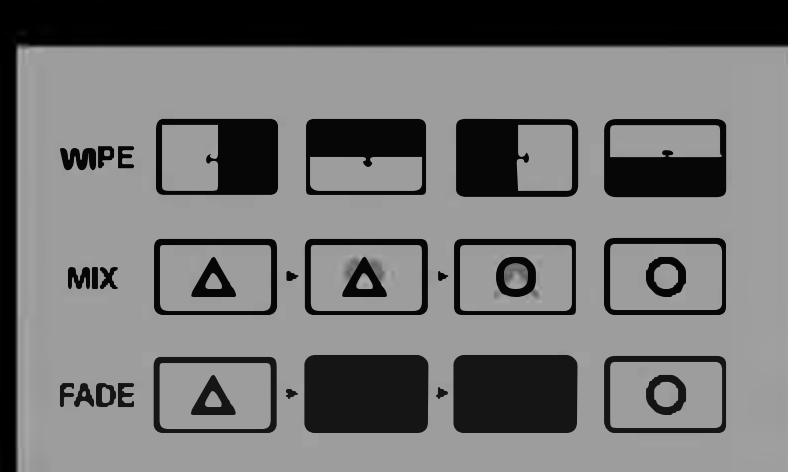

Transition Effects

Transition between PVW and PGM with WIPE / MIX / FADE effect through T-Bar & AUTO.



Audio Mixer

A built-in audio mixer can mix 2 external stereo 3.5mm stereo & RCA audio and 6 channels of embedded audio.



Portable metal design

Outstanding metal case architectonics, Convenient and suitable for the application of various occasions.



Rich interface

4×SDI and 2×HDMI inputs, 2×SDI & 1×HDMI PGM outputs, 1×SDI AUX output for PVW & PGM, 1×SDI & 1×HDMI multiview output. And the interface is hidden in the case, which can protect the interface from being damaged.

Widespread Application

The all-in-one 6 channel video switcher can be widely used in various field events, such as live sports, virtual studio, education, church, internet, concert, and so on.



Live Sports



Virtual Studio



Education



Party



Concert



Gaming Competitions



Live Weddings



Church

FUNCTIONS	Transitions	Manual T-bar/ AUTO/ CUT
	Functions	Wipe/ Mix/ Fade/ FTB
	Layouts	PIP/ Multiview
	Audio Mixer	Following/ Mixing
INPUTS	Video Inputs	SD/HD/3G-SDI(75Ω)×4, HDMI type-A(100Ω)×2
	Analog Audio Inputs	3.5mm stereo audio ×1, RCA(L/R)×1
	PGM Outputs	HD/3G-SDI(75Ω)×2, HDMI type-A(100Ω)×1
OUTPUTS	AUX Output	HD/3G-SDI(75Ω)×1
	Multiview Outputs	3G-SDI(75Ω)×1, HDMI type-A(100Ω)×1
	Analog Audio Output	3.5mm stereo audio ×1, RCA(L/R)×1
	LAN	RJ45×1, Synchronize local time
DATA INTERFACE	Tally	DB-15×1
	SDI Input Format Support	1080p 60/59.94/50/30/29.97/25/24/23.98 1080psF 30/29.97/25/24/23.98 1080i 60/59.94/50 720p 60/59.94/50/30/29.97/25/24/23.98 625i 50 PAL, 525i 59.94 NTSC
STANDARDS	HDMI Input Format Support	1080p 60/59.94/50/30/29.97/25/24/23.98/23.976 1080i 50/59.94/60 720p 60/59.94/50/30/29.97/25/24/23.98 576i 50, 576p 50
	PGM Output Format	1080p 60/59.94/50/30/29.97/25/24, 1080i 60/59.94/50
	Multiview Output Format	1080p 60
	SDI Compliance	SMPTE 292M/ SMPTE 259M/ SMPTE 424M
SIZE	Dimension(LWD)	330 × 243.5 × 67mm
	Weight	4.5 kg
	Woking Temp	-20~60℃
	Storage Temp	-30~70℃
	Current	DC 12V, 1.5A
POWER	Voltage	DC 6~17V
	Power Supply	DC 12V, 2A

