

# SWIT®

## CIMO

CINE V-mount Battery

CIMO-98S	98Wh
CIMO-160S	160Wh
CIMO-200S	196Wh
CIMO-290S	290Wh

### OLED Power Info Display



Standby  
Power %  
Display

Discharging  
Remaining  
Run time &  
Power %

Charging  
Power %  
Charging port  
Indicates

### Battery Health Level Check Long press power button



Battery Cycle times

Health level 1~3

Actual Max Capacity



### USB-C 65W Power Out

Power Laptops and Smart devices  
5V/9V/12V/15V = 3A, 20V(Max) = 3.25A  
BC1.2, PD2.0/3.0, QC2.0/3.0, FCP, SCP



### USB-C Charging In

CIMO-98S: use USB-C to C ≥45W charger  
CIMO-160S/200S/290S: use USB-C to C ≥60W charger  
All CIMO: Support USB-A to C 5V charging

### USB-A 18W Power Out

5V/9V = 2A 18W(Max)

### LED Torch


Find battery plate in dark environment.  
Double press power check button to switch  
on/off, and auto switching off after 60s.



### 2x D-tap Out/Charing In



### Power Load

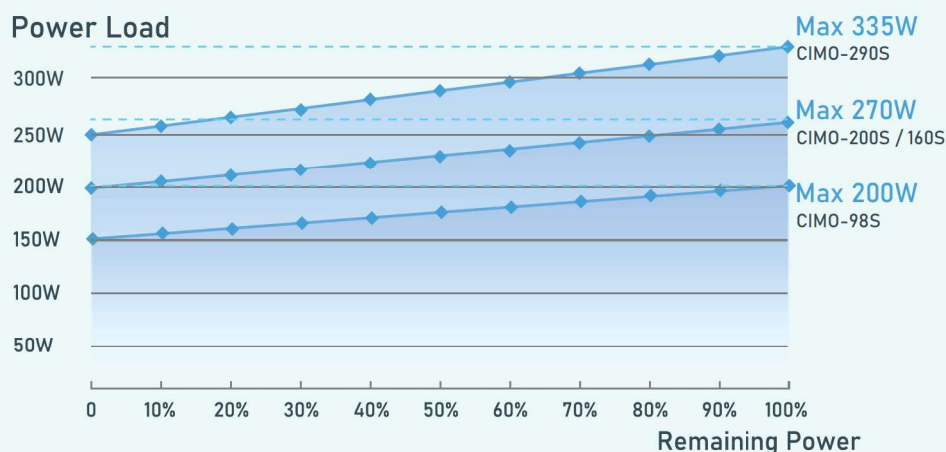

### True High Load

CIMO batteries output true high load to drive high power Cine cameras and on-camera devices together. The high load cells will also ensure battery life comparing to normal load batteries if long time full load output.

Model	Constant Load	Peak Load
CIMO-98S	150W	200W
CIMO-160S	200W	270W
CIMO-200S	200W	270W
CIMO-290S	250W	335W



**CIMO-98S 98Wh**



**CIMO-160S 160Wh**



**CIMO-200S 196Wh**



**CIMO-290S 290Wh**

- ♦ 150W/12A constant load
- ♦ 2×D-tap in & out
- ♦ 1×USB-A 5V/9V 2A out
- ♦ 1×USB-C 45W in 65W out
- ♦ 4-LED power indicator
- ♦ Built-in LED torch
- ♦ Strong 1.2m drop off proof

**150 w**  
High Load

**2×**  
D-tap

**65 w**  
USB-C

- ♦ 200W/16A constant load
- ♦ 100W/6A ultra fast charging
- ♦ 2×D-tap in & out
- ♦ 1×USB-A 5V/9V 2A out
- ♦ 1×USB-C 60W in 65W out
- ♦ OLED Remaining time display
- ♦ Built-in LED torch
- ♦ Strong 1.2m drop off proof

**200 w**  
High Load

**100 w**  
Fast Charge

**2×**  
D-tap

**65 w**  
USB-C

- ♦ 200W/16A constant load
- ♦ 100W/6A ultra fast charging
- ♦ 2×D-tap in & out
- ♦ 1×USB-A 5V/9V 2A out
- ♦ 1×USB-C 60W in 65W out
- ♦ OLED Remaining time display
- ♦ Built-in LED torch
- ♦ Strong 1.2m drop off proof

**200 w**  
High Load

**100 w**  
Fast Charge

**2×**  
D-tap

**65 w**  
USB-C

- ♦ 250W/20A constant load
- ♦ 100W/6A ultra fast charging
- ♦ 2×D-tap in & out
- ♦ 1×USB-A 5V/9V 2A out
- ♦ 1×USB-C 60W in 65W out
- ♦ OLED Remaining time display
- ♦ Built-in LED torch
- ♦ Strong 1.2m drop off proof

**250 w**  
High Load

**100 w**  
Fast Charge

**2×**  
D-tap

**65 w**  
USB-C

## Double-Shell Structure

Strong 1.2m drop off proof



Survive from 1.2 meters drop-off at any angles, strong and reliable for filmmakers.



## Ultra Fast Charging

Twice the charging speed \*

by SWIT PC-P461S, MATRIX-S8, S-3812S chargers



## Charging Time

Model	Charging current	0-80%	0-100%
CIMO-98S	3A (Max 4A)	1h 40m	2h 45m
CIMO-160S	6A (Max 8A)	1h 30m	2h 30m
CIMO-200S	6A (Max 8A)	1h 40m	2h 45m
CIMO-290S	6A (Max 8A)	2h 30m	3h 50m

\* CIMO batteries use Ternary Lithium cells and the fast charging will not affect the battery lifespan.

